


imageRUNNER C1325iF/C1335iF

Compact and productive colour multifunctionals

These feature rich A4 multifunctional devices are designed for cost conscious businesses that require productive high quality colour communication for small workgroups. A compact design means they fit perfectly into small office environments.



Productivity:

- Simple operation with a 8.9 cm colour touch and swipe user interface
- A range of flexible mobile printing and scanning capabilities, such as Apple AirPrint™, Mopria printing and Canon's optional uniFLOW solution, support mobile worker efficiency
- Up to 2,300 sheet paper capacity for busy workgroups and departments in any size organisation
- Enhanced productivity and paper saving with auto duplex functionality
- Easily scan and send documents directly to a variety of destinations including email and shared folder
- Easy maintenance design for less downtime
- Canon's V² colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest

Security and cost control:

- Efficient, high quality colour printing thanks to separate toner and drum technology
- The functionality of many devices in one compact multifunctional device
- Documents remain secure with features such as secure print, pin release and optional PDF password protection
- Greater cost control and security with embedded support for Canon's optional uniFLOW software
- Canon's longer life drum technology reduces the need to replace consumables frequently



PRINT



COPY



FAX



SCAN

Canon

Compact and productive
colour multifunctionals

imageRUNNER C1325iF/C1335iF

Integration and management:

- With their compact design, these devices fit into various office environments where space is a premium either as a desktop or floor standing
- Seamlessly integrate these devices into IT environments, supporting industry standards such as PCL and Genuine Adobe PS
- Reduce fleet management and administration burden with automated meter collection, consumables management, remote updating and diagnostics


Energy efficient:

- Class-leading Typical Electricity Consumption (TEC)* ratings
- Consumes as little as 1 W in sleep mode
- Rapid recovery from sleep mode
- ENERGY STAR® qualified
- Qualifies for the stringent Blue Angel Award**

*Typical Energy Consumptions as defined by ENERGY STAR
<http://www.eu-energystar.org>

**imageRUNNER C1325iF only

AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

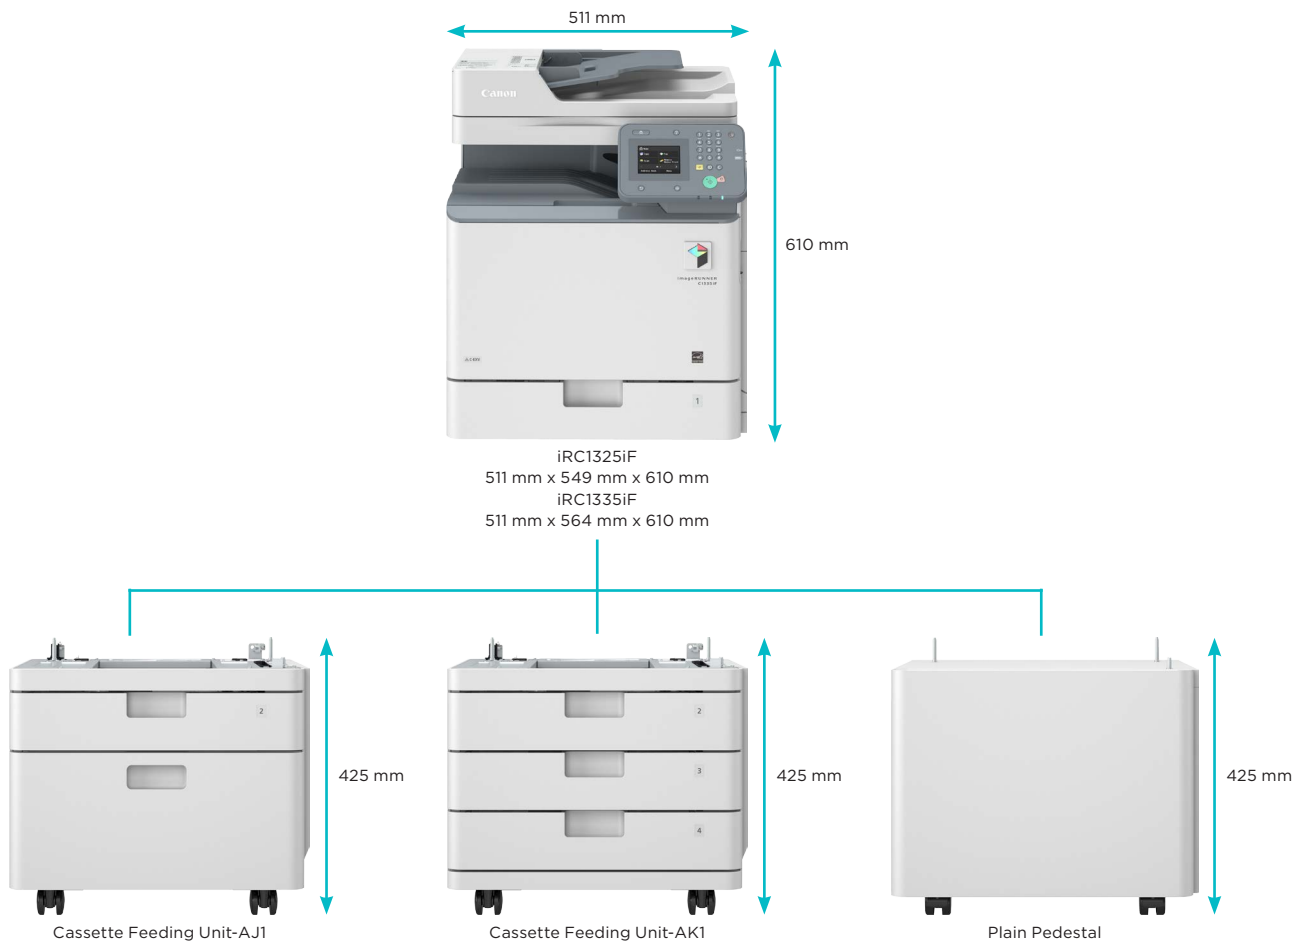

Technical Specifications

imageRUNNER C1325iF/C1335iF

Machine type	Colour A4 Laser Multifunctional (Reader / Printer standard)	Supported media weight/s	Single-sided scanning: 50 to 105 gsm (DADF) Double-sided scanning: 64 to 105 gsm (DADF)
Available core functions	Print, Copy, Scan, Send and Fax standard	Scan resolution	BW Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi CL Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi
Printer Specifications		Double sided scanning	2-sided to 2-sided (Automatic)
Print speed (BW/Colour)	C1335iF: 35/35ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 35/35ppm (A4 Double-sided), 26/26ppm (A5 Double-sided) C1325iF: 25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)	Scan speed	C1335iF: BW single-sided: 35 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 11 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 35 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 11 ipm (A4, 300 dpi X 300 dpi) C1325iF: BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi)
Printing method	Colour Laser Beam Printing	Scan methods	Push Scan: Colour Send functionality is standard. Pull Scan: TWAIN / WIA Pull scanning available on all models. Scan to USB Memory Key: Available on all models Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.
Print resolution	2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi	Pull scan specifications	TWAIN/WIA Pull scanning Windows XP Windows Vista/Windows 7/Windows 8/Windows 8.1 Mac Scan (TWAIN only) Mac OS X 10.5.8 or later *The drivers are available via http://software.canon-europe.com .
Double sided printing	Automatic (Standard)	Send Specifications	Standard on all models
Direct print	Direct printing available from USB memory key Supported file types: JPEG, TIFF, PDF	Optional/Standard	100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi
Printing from mobiles or internet-connected devices and cloud-based services	A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.	Send resolution	E-Mail, Fax, PC (SMB, FTP)
Paper input (Standard)	1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray	Destinations	LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials)
Paper input (Option)	1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1) 3 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AK1)	Address Book/Speed dials	SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF E-mail : PDF, Compact PDF, Searchable PDF
Maximum paper input capacity	2300 sheets (80 gsm)	File formats	Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.
Paper output capacity	250 sheets (80 gsm)	Optional Universal Send Feature Sets	
Finishing capabilities	Standard: Collate, Group	Fax Specifications	Standard on all models
Supported media types	Cassette/s: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	Modem speed	Super G3 33.6 kbps (Up to 3 seconds per page*)
	Paper cassette 1: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi Up to 512 pages ¹
	Paper cassettes 2, 3 and 4: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	FAX memory	Max. 281
	Multi-purpose tray: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	Speed dials	Max. 199 dials
Supported media sizes	Paper cassettes 1: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	Group dials/destinations	Max. 310 addresses
	Paper cassettes 2, 3 and 4: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	Sequential broadcast	Yes
	Multi-purpose tray: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	Memory backup	Fax Forwarding, Dual Access, PC Fax (TX only)
Supported media weights	Paper cassette/s: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. Multi-purpose tray: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	Other features	
	Paper cassette 1: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	General Specifications	
	Paper cassettes 2, 3 and 4: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	Warm-up time	Approx. 34 seconds from power ON
	Multi-purpose tray: Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	Recovery from sleep mode	10 seconds or less
Page Description Language(s)	UFR II, PCL5c/6, Adobe PostScript Level 3 (Standard on all models)	Interface type	USB 2.0 Hi-Speed, 1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device Recommended third party wireless solution is Silex SX-BR-4600 WAN For more details please refer to www.sillex-europe.com
Fonts	PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts PS fonts: 136 Roman fonts	Network protocols	TCP / IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP), IPX / SPX (NDS, Bindery) *IPv4 / IPv6 support
Operating System compatibility	UFR II: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2 PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1 Please refer to http://software.canon-europe.com/ for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place.	Memory Control panel	1.0 GB QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display
Copy Specifications		Dimensions (W x D x H)	Standard: C1325iF 511 mm x 549 mm x 610 mm C1335iF 511 mm x 564 mm x 610 mm Optional: C1325iF With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm C1325iF With Cassette Feeding Unit-AK1: 511 mm x 549 mm x 1035 mm C1325iF With Plain Pedestal Type-F1: 511 mm x 549 mm x 1035 mm C1335iF With Cassette Feeding Unit-AJ1: 511 mm x 564 mm x 1035 mm C1335iF With Cassette Feeding Unit-AK1: 511 mm x 564 mm x 1035 mm C1335iF With Plain Pedestal Type-F1: 511 mm x 564 mm x 1035 mm
Copy speed (BW/Colour)	Please refer to the quoted print speeds		
First Copy Output Time (FCOT) (BW/Colour)	C1335iF: 5.9 sec / 7.4 sec C1325iF: 8.4 sec / 10.5 sec		
Copy resolution	Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi		
Multiple copy	Up to 999 copies		
Reduction/Enlargement	Zoom: 25 - 400 % in 1 % increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%		
Scan Specifications			
Optional/Standard	Standard on all models (DADF 50 sheets)		
Supported media size/s	A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF)		

Technical Specifications

imageRUNNER C1325iF/C1335iF

Installation space (W x D)

C1325iF: 852 mm x 843 mm
(Main unit + Multi-purpose tray open + Cassette drawers open)
C1335iF: 852 mm x 858 mm
(Main unit + Multi-purpose tray open + Cassette drawers open)

Weight

Approx. 43 kg excluding toner

Operating environment

Temperature: 10 to 30°C (50 to 86°F)
Humidity: 20 to 80 % RH (no condensation)

Power source

220 - 240 V (±10 %), 50 / 60 Hz (±2 Hz), 3.7 AMP

Power consumption

Maximum: Approx. 1.5 kW
Standby: Approx. 30 W
Sleep mode: Approx. 1.0 W or less²
Time to put the device to sleep mode: 60 sec
Typical Electricity Consumption (TEC) rating³:
1.2 kWh (C1335iF) / 0.8 kWh (C1225iF)

Noise levels

Sound Pressure⁴ (reference data, LpAm, Bystander's position)

Sound Pressure Noise Levels:
C1325iF
Active: 50 dB
Standby: Inaudible (Less than 30dB)
C1335iF
Active: 51 dB
Standby: Inaudible (Less than 30dB)

Software and printer management

iW Management Console: Server-based software for centralised management of a fleet of devices
eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.
Remote Firmware System (GDLS): Allows the remote distribution of firmware,
Remote User Interface (RUI): Web-based interface to each device that helps to provide remote device management and control.
Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers

Security features

Standard:
IP / Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID
Optional:
Send PDF Security Feature Set-E1@E
The following items require uniFLOW: My Print Anywhere secure print, Data Loss Prevention.

Consumables

Toner bottle

C-EXV 48 Black/Cyan/Magenta/Yellow Toner (Yield: BK 16,500 / CMY 11,500 pages)⁵

Specifications for options

Cassette feeding unit

Name: Cassette Feeding Unit-AJ1
Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.
Dimensions (W x D x H): 511 mm x 508 mm x 425 mm
Weight: Approx. 15 kg

Name: Cassette Feeding Unit-AK1
Description: Optional cassette feeding unit with 3 x 550 sheets paper capacity. Takes the cassette paper capacity up to 2,300 sheets.
Dimensions (W x D x H): 511 mm x 508 mm x 425 mm
Weight: Approx. 19 kg

Hardware accessories 1

Plain Pedestal Type-F1: The pedestal can be placed under the standard cassette module to raise the device when free-standing. (Height of Pedestal: 426 mm)

Hardware accessories 2

Copy Card Reader Attachment-H1:
HANDSET-J1 EUR / HANDSET-J1 SA:
Copy Card Reader-F1:
MICARD Attachment Kit-A1:

Print controller accessories

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

System accessories

Copy Control Interface Kit-C1: Allows connection (CCVI I / F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.

Document security accessories

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Accessibility accessories

ADF ACCESS HANDLE-A1: Attaches to the document feeder, making access easier for seated users.

Footnotes

¹ Based on ITU-T Standard Chart No. 1

² 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

³ Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

⁴ Declared noise emission in accordance with ISO 7779

⁵ Based on 5% coverage (A4)

All specifications subject to change without notice



C1325iF only



Canon Inc.
canon.com

Canon Europe
canon-europe.com

UK English edition
© Canon Europa N.V., 2015

Canon (UK) Ltd
Woodhatch
Reigate
Surrey RH2 8BF
Telephone no 01737 220000
Facsimile 01737 220022
canon.co.uk

Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co.Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie



Hay's Lane
London
SE1 2HB
Tel: 020 7536 2300
Email:
sales@ommdigital.co.uk
www.ommdigital.co.uk